


IES 4425-4 LED Head

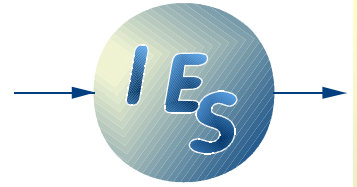

PRELIMINARY SHORTFORM DATA

Modular LED Head for high speed video.

- ☺ **48000 lm**
- ☺ **Selectable illumination angles**
- ☺ **Modular design for building Arrays**
- ☺ **Dimensions 108 x 108 x 45 mm³**
- ☺ **Lilon LED Supply/Controller available**
- ☺ **Ruggedized for onboard and offboard use**



IES Ingenieurbüro für Elektronikentwicklung und Spezialgerätebau

Postanschrift
Volkmaroder Strasse 8A
D-38104 Braunschweig

FON +49 531 701273-0
FAX +49 531 701273-19

Bankverbindung Postbank Hannover
BLZ 250 100 30, Konto 905 693 302
USTIDNr. DE 177335140

Specifications

Metrics	
Dimensions	108 x 108 x 45 mm ³
Weight	1 kg

Environment	
Temperature range	0 ... 50 °C
Acceleration	100 g

Electrical Interface	
Connector	Lemosia FGG.2B.310

Illumination Parameters	
Illumination angle	45° (standard, others on request)

Ordering information: IES 4425-4

Also available:

- IES 4420 Mini LED Head 12000 lm
- IES 4421 Mini LED Head 24000 lm
- IES 4422 Mini LED Head 12000 lm
- IES 4424 LED Sync Lamp 96000 lm
- IES 4412 Stationary LED Controller
- IES 4414 Onboard LED Controller
- IES 4416 OnBoard LED-Controller

Information is provided without warranty and is subject to change without notice. We reserve the right to make changes whenever necessary to improve to the product.
Revision 2012-08